

LED 가로등기구


주식회사 디앤알라이팅

등록제품 17개

발행일 2026.09.29

LED 가로등기구 제품목록

주식회사 디앤알라이팅

No.	제품사진	모델명	식별번호	계약단가	소비전력	SIZE	색온도	인증마크
1		DNR-S075-75W	23390541	348,500원	75 ±10%	514*267*90	5,028±283	    
2		DNR-LS150-150W	23432934	285,000원	150 ±10%	715*304*172	5,028±283	    
3		DNR-LS100-100W	23434139	250,000원	100 ±10%	715*304*172	5,028±283	    
4		DNR-S250W-50K	23841861	620,000원	250 ±10%	893*367*110	5,028±283	    
5		DNR-S200W-50K	23841862	530,000원	200 ±10%	893*367*110	5,028±283	    
6		DNR-STAT250W-50K	24339690	500,000원	250 ±10%	747*377*151	5,028±283	    
7		DNR-STAT150W-50K	24339692	390,000원	150 ±10%	747*377*151	5,028±283	    
8		DNR-STAT200W	24847196	390,000원	200 ±10%	747*377*151	5,028±283	    
9		DNR-STL-104S	25173637	290,000원	100 ±10%	567*279*119	3,985±275	    
10		DNR-STL-124S	25173638	310,000원	120 ±10%	750*335*126	3,985±275	    
11		DNR-STL-150S	25173640	269,000원	150 ±10%	750*335*126	5,028±283	    
12		DNR-ST075W-40K	26182849	290,000원	75 ±10%	481*213*122	3,985±275	    

LED 가로등기구 제품목록

주식회사 디앤알라이팅

No.	제품사진	모델명	식별번호	계약단가	소비전력	SIZE	색온도	인증마크
13		DNR-ST100W-40K	26182850	340,000원	100 ±10%	788*300*136	3,985±275	    
14		DNR-ST125W-40K	26182851	360,000원	125 ±10%	788*300*136	3,985±275	    
15		DNR-ST150W-40K	26182852	380,000원	120 ±10%	788*300*136	3,985±275	    
16		DNR-ST150W-30K	26182853	380,000원	150 ±10%	788*300*136	3,045±175	    
17		DNR-ST125W-30K	26182854	360,000원	125 ±10%	788*300*136	3,045±175	    

DNR-S075-75W


식별번호	23390541
계약단가	348,500원



제품명
LED 가로등기구

SIZE	색온도	계약단가
514*267*90	5,028±283	348,500원

제품도면 (Unit: mm)

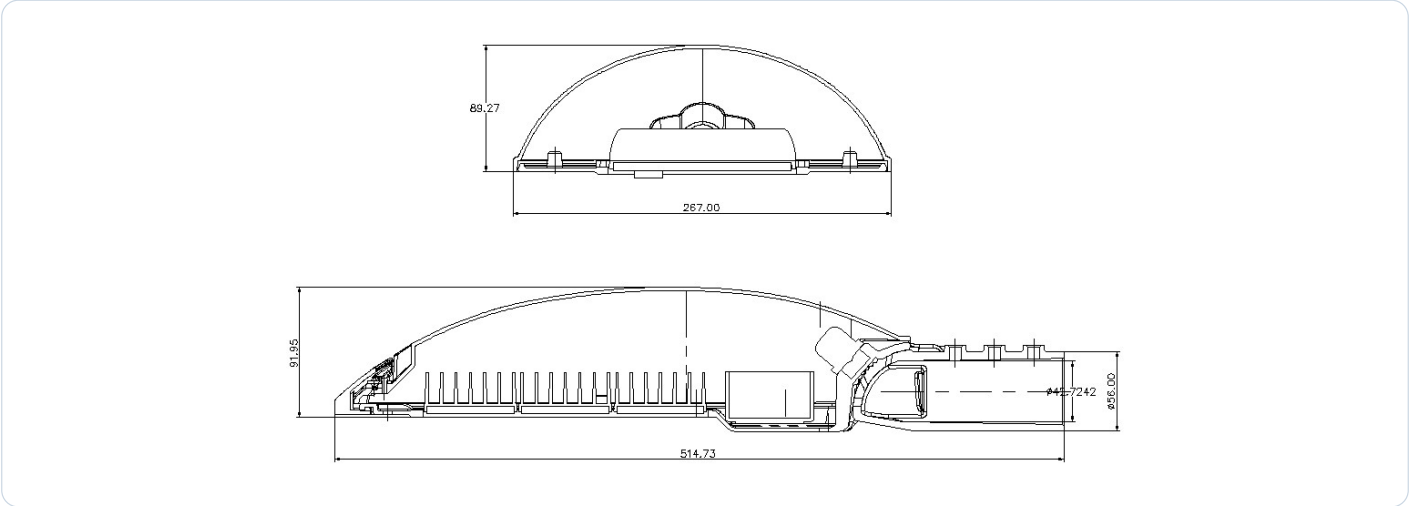

제품 사양

소비전력	75 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	8,625 이상	연색성(CRI)	75 이상
색온도	5,028±283	SIZE	514*267*90
LED PKG	서울반도체	컨버터	UPF80S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.34 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-LS150-150W


식별번호	23432934
계약단가	285,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
715*304*172	5,028±283	285,000원

제품도면 (Unit: mm)

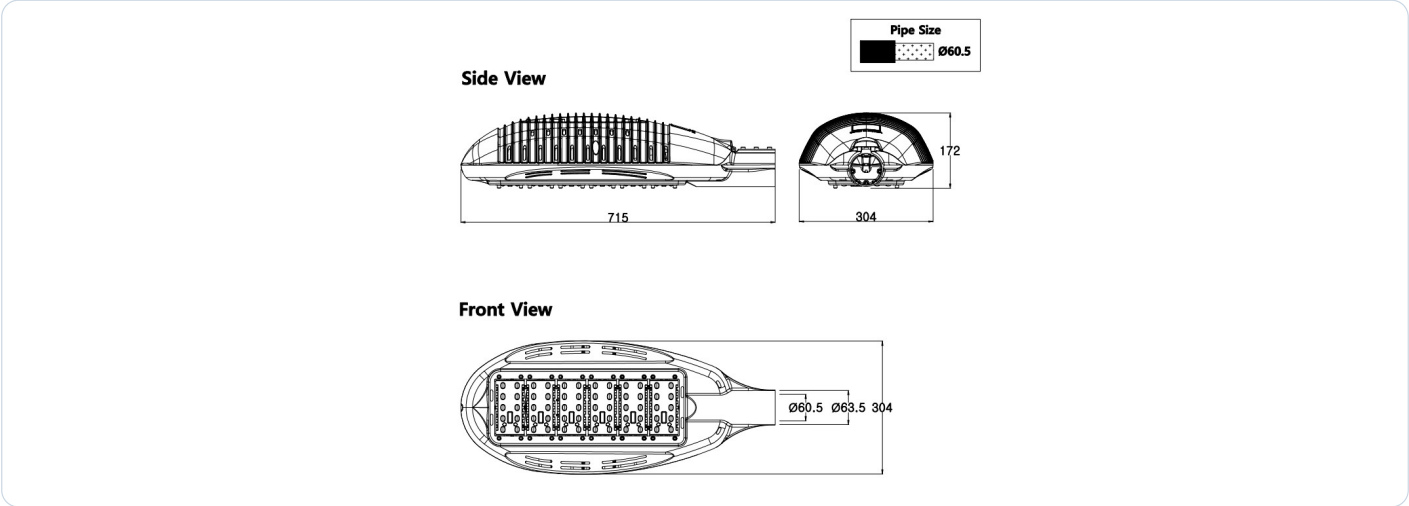

제품 사양

소비전력	150 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	17,250 이상	연색성(CRI)	75 이상
색온도	5,028±283	SIZE	715*304*172
LED PKG	서울반도체	컨버터	UPF150S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.68 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-LS100-100W

식별번호

23434139

계약단가

250,000원



제품명

LED 가로등기구

SIZE

715*304*172


색온도

5,028±283

계약단가

250,000원

제품도면 (Unit: mm)

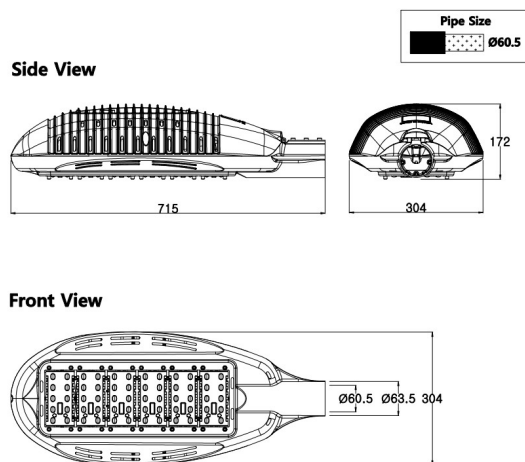

제품 사양

소비전력	100 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	11,500 이상	연색성(CRI)	75 이상
색온도	5,028±283	SIZE	715*304*172
LED PKG	서울반도체	컨버터	UPF100S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.45 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증



DNR-S250W-50K


식별번호	23841861
계약단가	620,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
893*367*110	5,028±283	620,000원

제품도면 (Unit: mm)

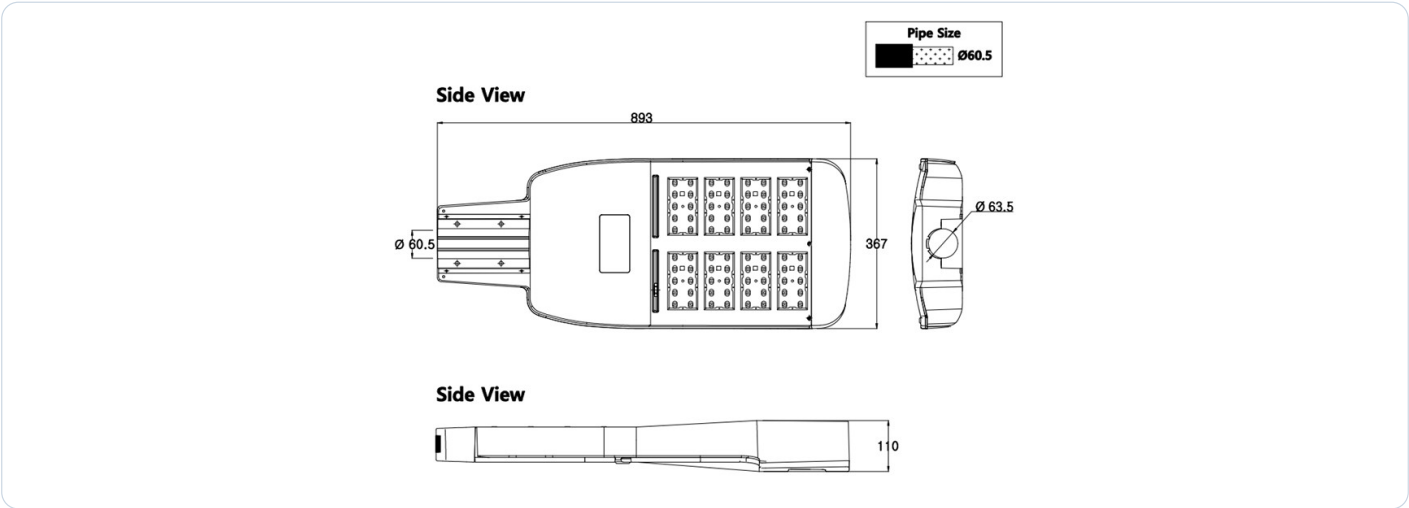

제품 사양

소비전력	250 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	28,750 이상	연색성(CRI)	75 이상
색온도	5,028±283	SIZE	893*367*110
LED PKG	서울반도체	컨버터	UPF240S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	1.136 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-S200W-50K


식별번호	23841862
계약단가	530,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
893*367*110	5,028±283	530,000원

제품도면 (Unit: mm)

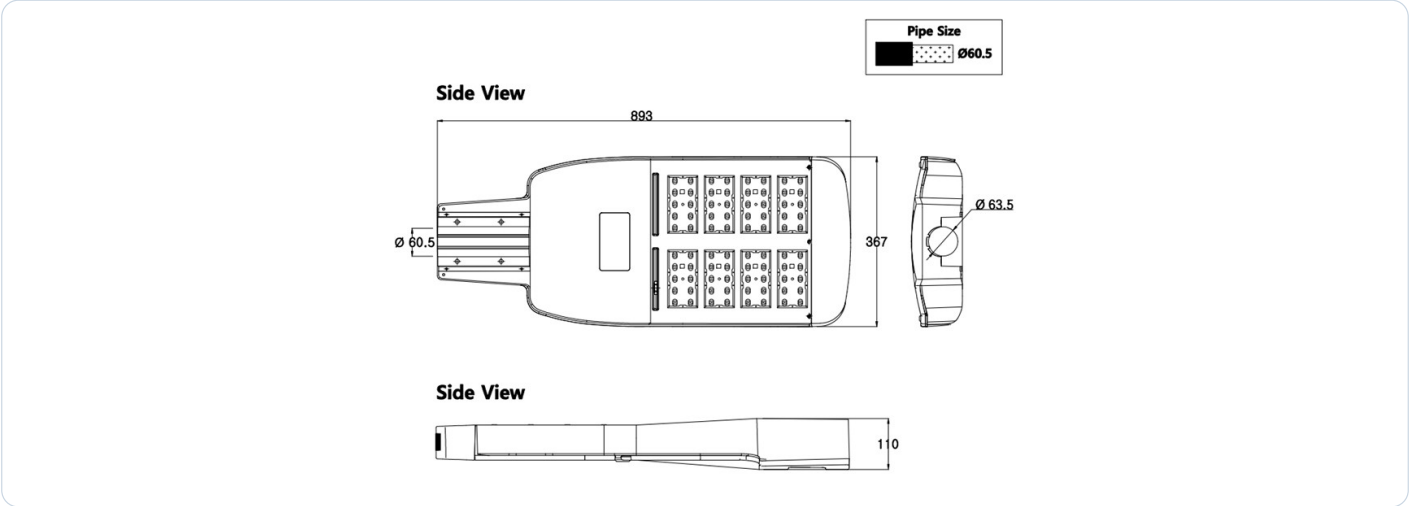

제품 사양

소비전력	200 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	23,000 이상	연색성(CRI)	75 이상
색온도	5,028±283	SIZE	893*367*110
LED PKG	서울반도체	컨버터	UPF200S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.90 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-STAT250W-50K


식별번호	24339690
계약단가	500,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
747*377*151	5,028±283	500,000원

제품도면 (Unit: mm)

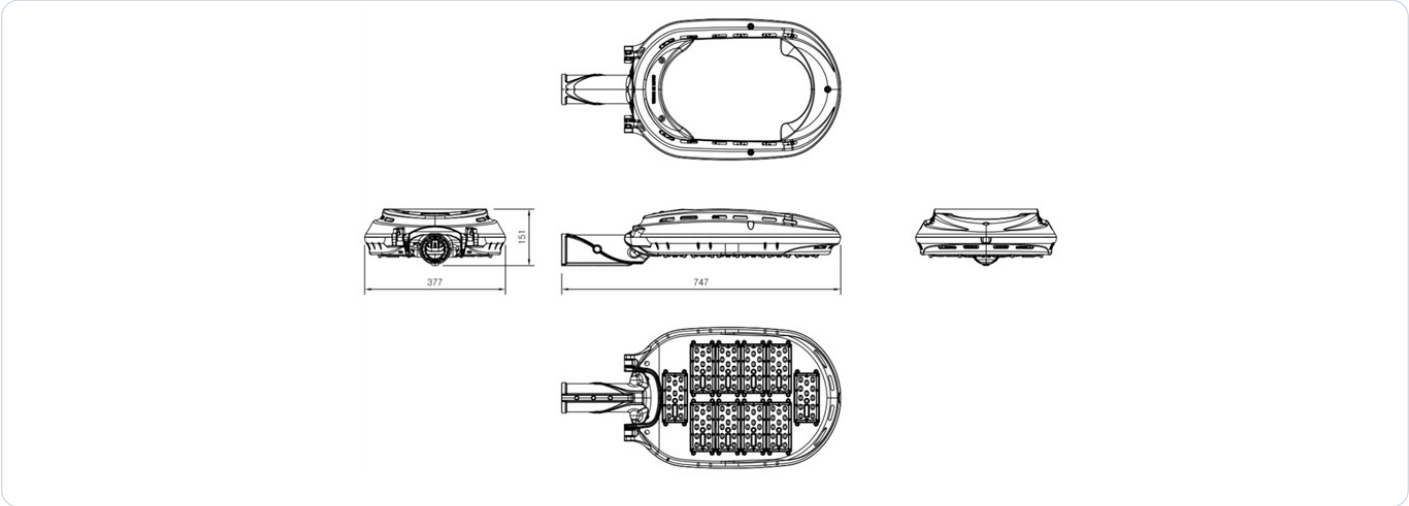

제품 사양

소비전력	250 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	28,750 이상	연색성(CRI)	75 이상
색온도	5,028±283	SIZE	747*377*151
LED PKG	서울반도체	컨버터	UPF240S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	1.136 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증











DNR-STAT150W-50K


식별번호	24339692
계약단가	390,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
747*377*151	5,028±283	390,000원

제품도면 (Unit: mm)

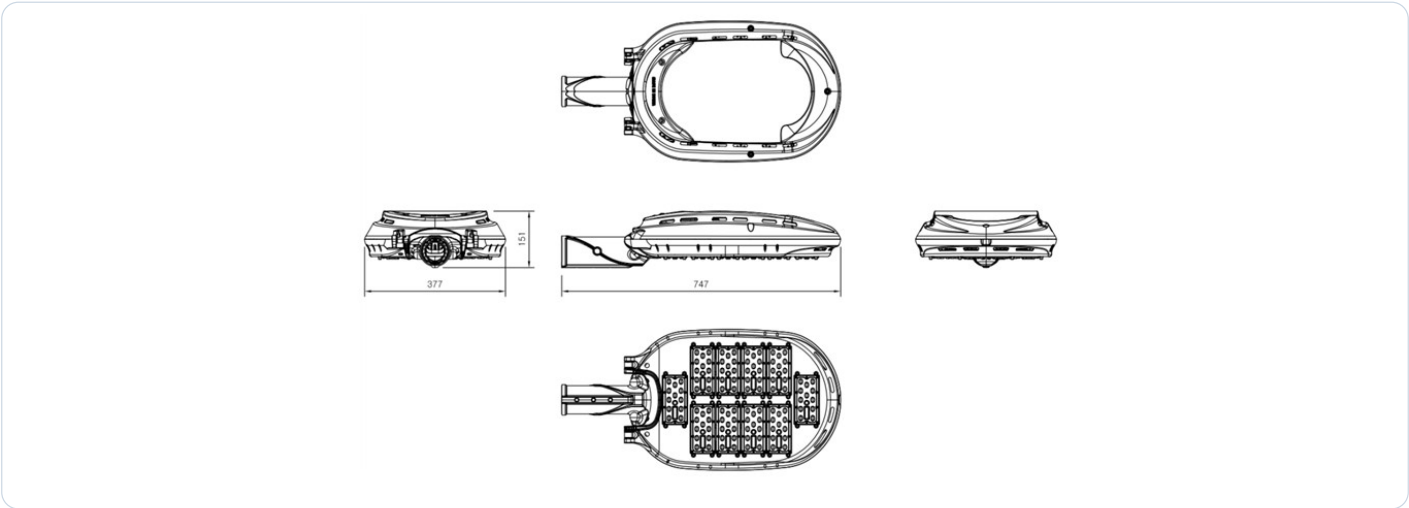

제품 사양

소비전력	150 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	17,250 이상	연색성(CRI)	75 이상
색온도	5,028±283	SIZE	747*377*151
LED PKG	제조사 확인 필요	컨버터	SLA-100SLD
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.68 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-STAT200W


식별번호	24847196
계약단가	390,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
747*377*151	5,028±283	390,000원

제품도면 (Unit: mm)

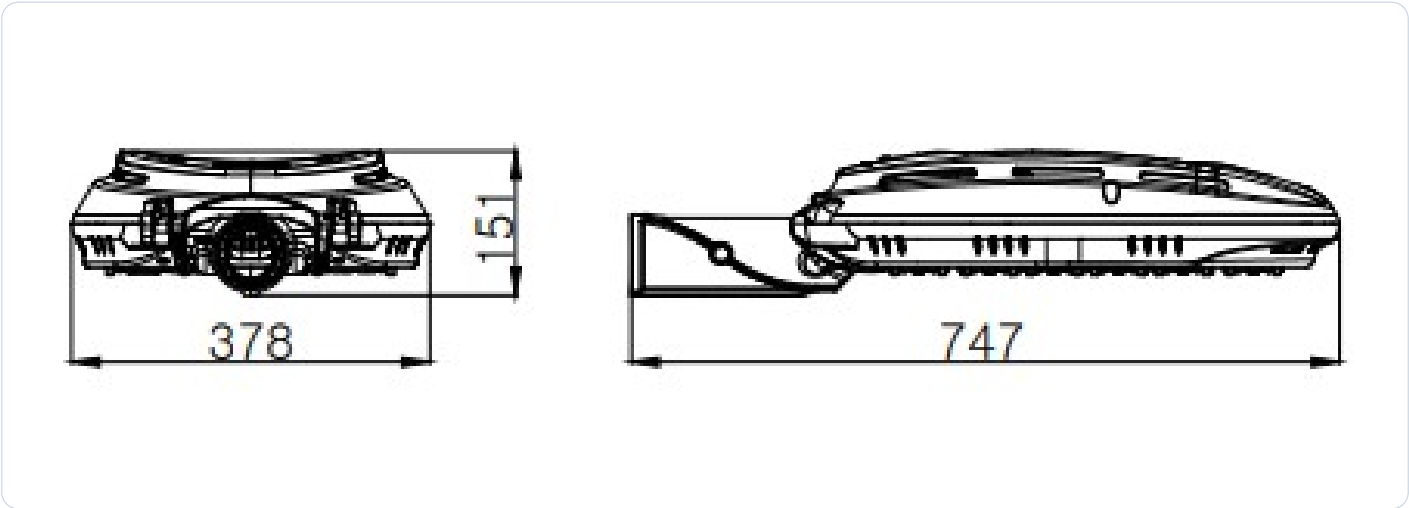

제품 사양

소비전력	200 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	23,000 이상	연색성(CRI)	75 이상
색온도	5,028±283	SIZE	747*377*151
LED PKG	제조사 확인 필요	컨버터	UPF200S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.90 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지



여성기업



G-PASS

DNR-STL-104S


식별번호	25173637
계약단가	290,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
567*279*119	3,985±275	290,000원

제품도면 (Unit: mm)

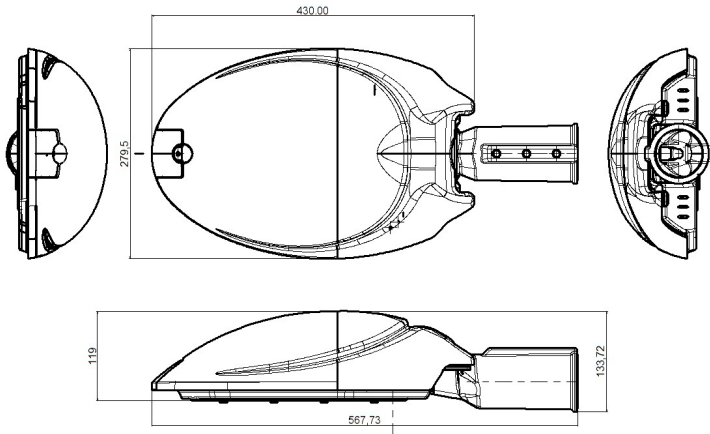

제품 사양

소비전력	100 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	11,500 이상	연색성(CRI)	75 이상
색온도	3,985±275	SIZE	567*279*119
LED PKG	제조사 확인 필요	컨버터	UPF100S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.47 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지



여성기업



G-PASS

DNR-STL-124S


식별번호	25173638
계약단가	310,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
750*335*126	3,985±275	310,000원

제품도면 (Unit: mm)

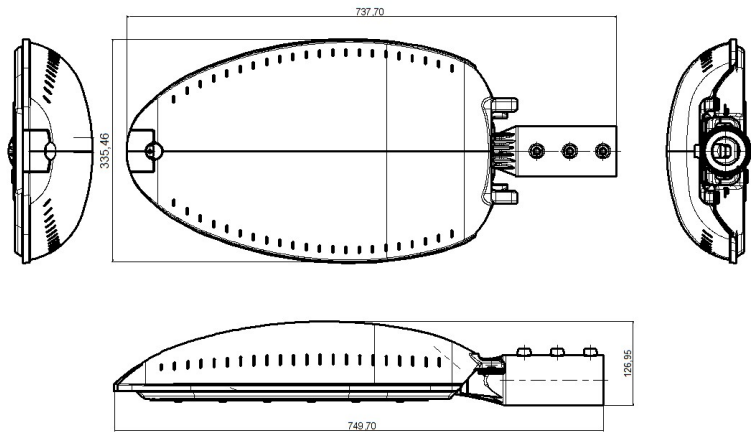

제품 사양

소비전력	120 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	13,800 이상	연색성(CRI)	75 이상
색온도	3,985±275	SIZE	750*335*126
LED PKG	제조사 확인 필요	컨버터	UPF120S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.54 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증











DNR-STL-150S


식별번호	25173640
계약단가	269,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
750*335*126	5,028±283	269,000원

제품도면 (Unit: mm)

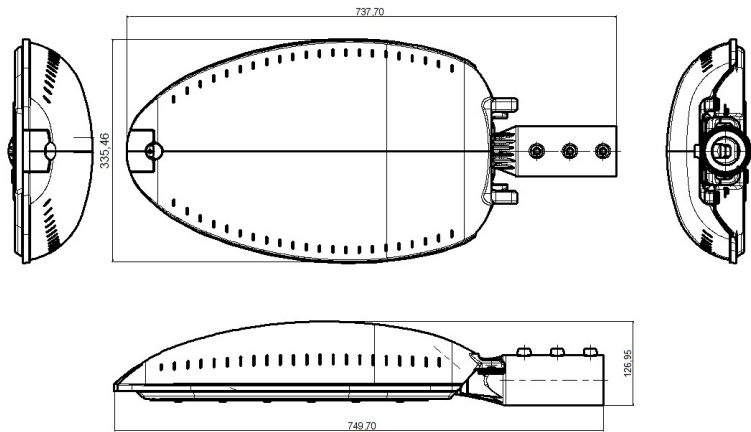

제품 사양

소비전력	150 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	17,250 이상	연색성(CRI)	75 이상
색온도	5,028±283	SIZE	750*335*126
LED PKG	제조사 확인 필요	컨버터	UPF150S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.68 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-ST075W-40K


식별번호	26182849
계약단가	290,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
481*213*122	3,985±275	290,000원

제품도면 (Unit: mm)

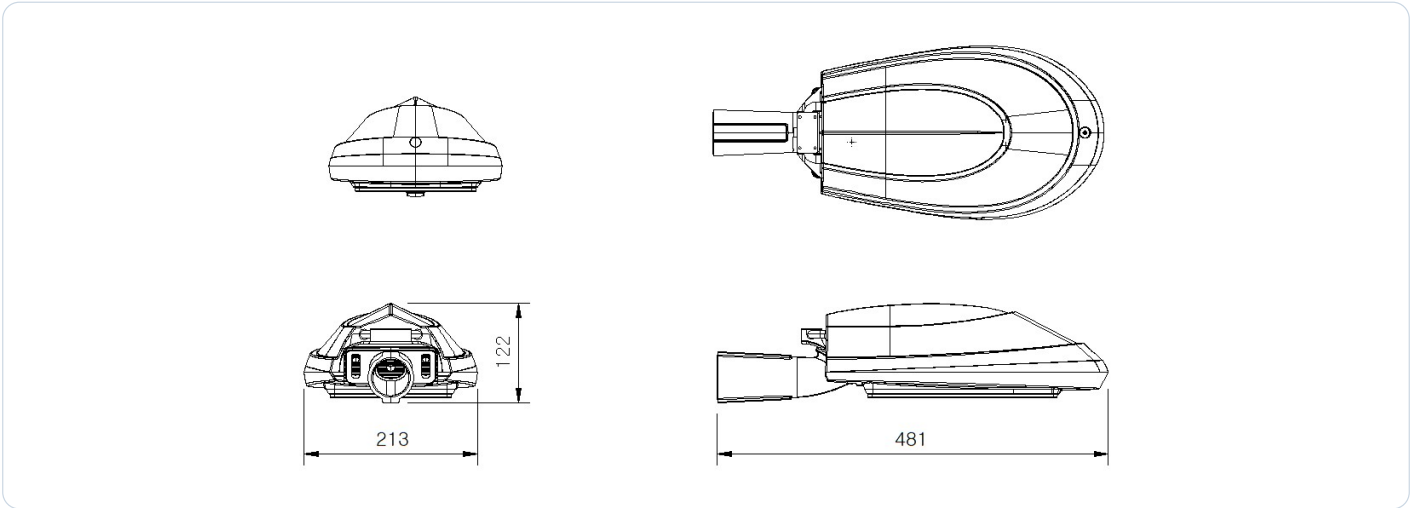

제품 사양

소비전력	75 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	8,625 이상	연색성(CRI)	75 이상
색온도	3,985±275	SIZE	481*213*122
LED PKG	제조사 확인 필요	컨버터	UPF150S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.34 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-ST100W-40K


식별번호	26182850
계약단가	340,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
788*300*136	3,985±275	340,000원

제품도면 (Unit: mm)

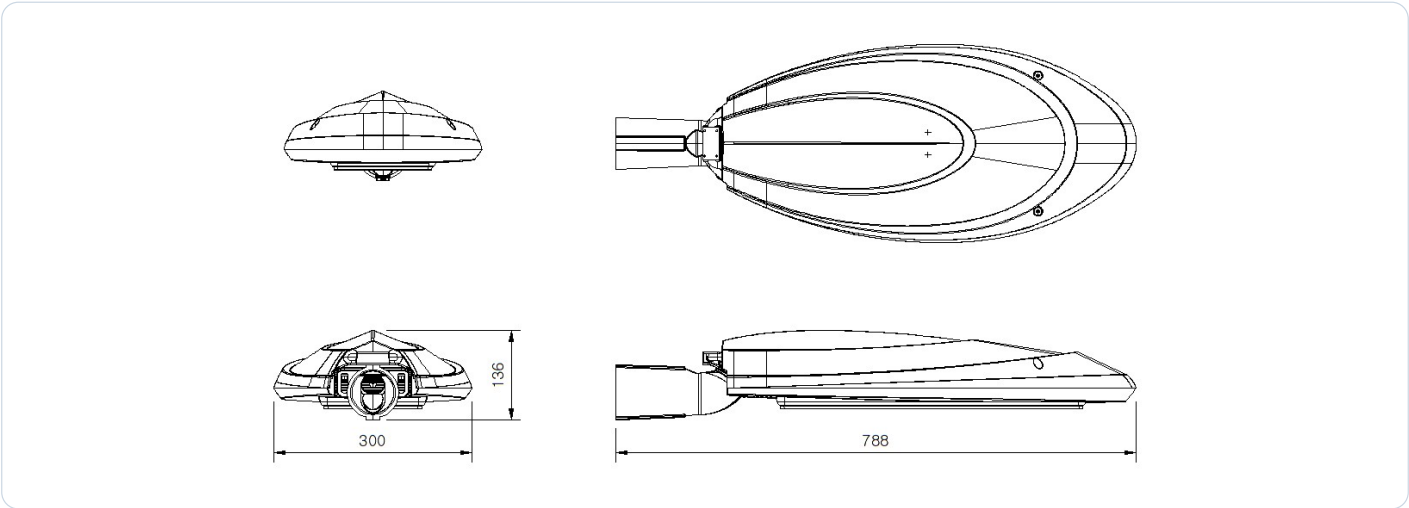

제품 사양

소비전력	100 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	11,500 이상	연색성(CRI)	80 이상
색온도	3,985±275	SIZE	788*300*136
LED PKG	제조사 확인 필요	컨버터	UPF150S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.45 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-ST125W-40K


식별번호	26182851
계약단가	360,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
788*300*136	3,985±275	360,000원

제품도면 (Unit: mm)

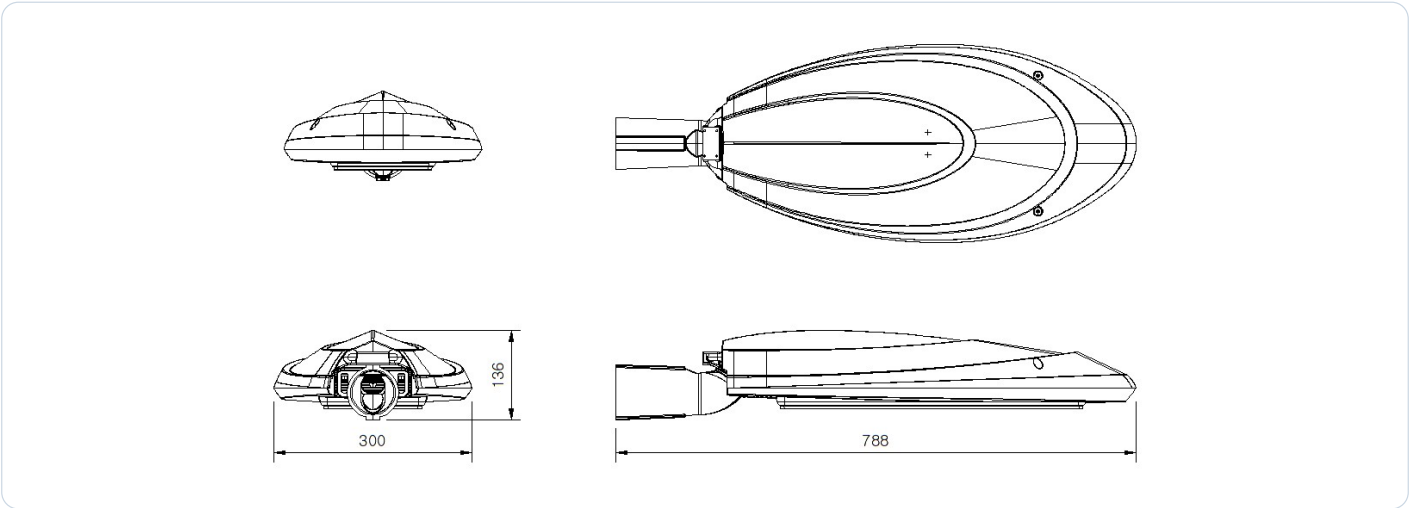

제품 사양

소비전력	125 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	14,375 이상	연색성(CRI)	80 이상
색온도	3,985±275	SIZE	788*300*136
LED PKG	제조사 확인 필요	컨버터	UPF150S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.58 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-ST150W-40K


식별번호	26182852
계약단가	380,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
788*300*136	3,985±275	380,000원

제품도면 (Unit: mm)

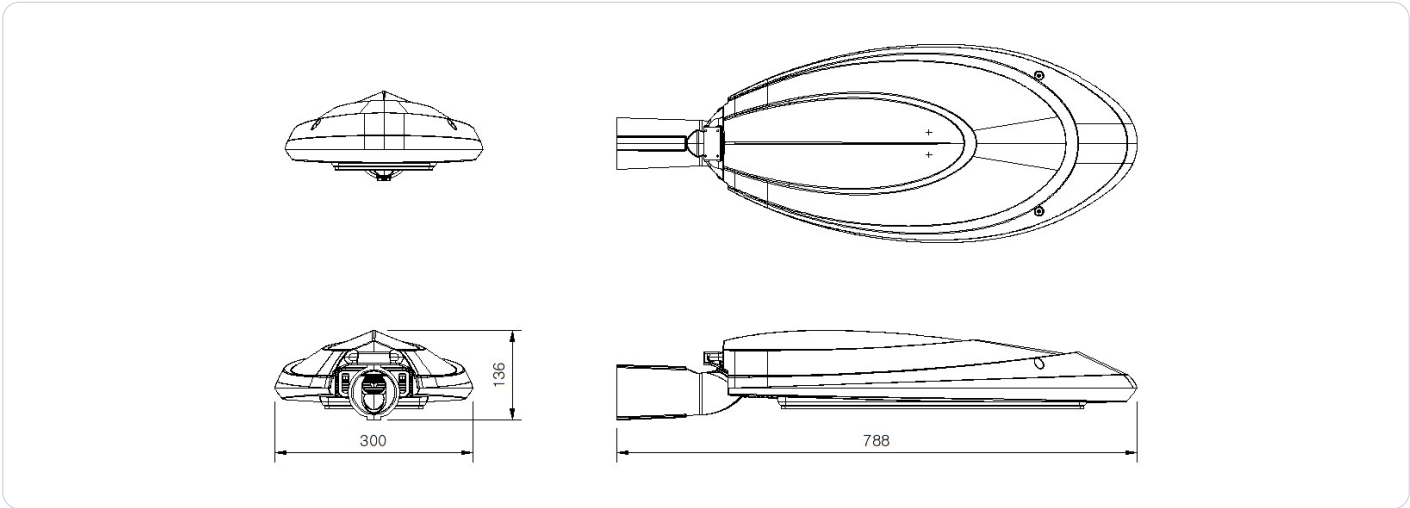

제품 사양

소비전력	120 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	13,800 이상	연색성(CRI)	75 이상
색온도	3,985±275	SIZE	788*300*136
LED PKG	제조사 확인 필요	컨버터	UPF150S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.56 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-ST150W-30K

식별번호

26182853

계약단가

380,000원



제품명

LED 가로등기구

SIZE

788*300*136


색온도

3,045±175

계약단가

380,000원

제품도면 (Unit: mm)

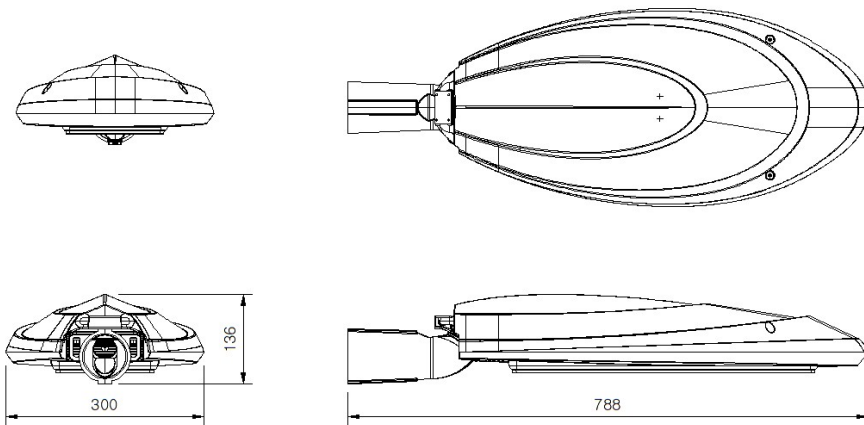

제품 사양

소비전력	150 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	17,250 이상	연색성(CRI)	75 이상
색온도	3,045±175	SIZE	788*300*136
LED PKG	제조사 확인 필요	컨버터	UPF150S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.7 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증



DNR-ST125W-30K


식별번호	26182854
계약단가	360,000원



제품명
LED 가로등기구

SIZE	색온도	계약단가
788*300*136	3,045±175	360,000원

제품도면 (Unit: mm)

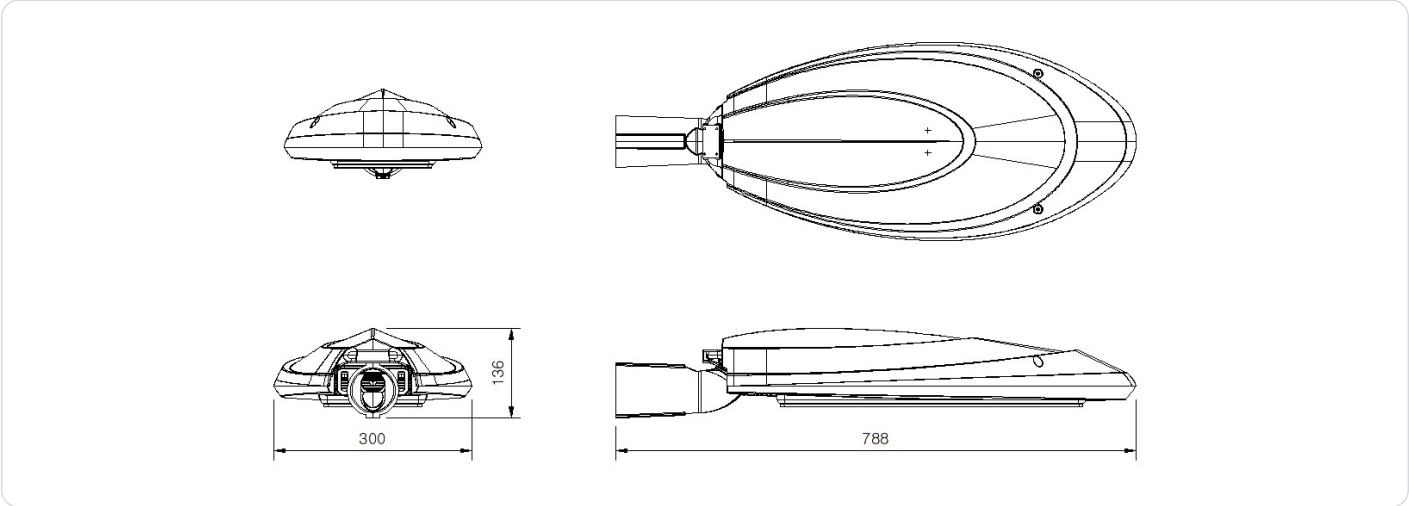

제품 사양

소비전력	125 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP65 이상
총 광속	14,375 이상	연색성(CRI)	80 이상
색온도	3,045±175	SIZE	788*300*136
LED PKG	제조사 확인 필요	컨버터	UPF150S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.58 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지



여성기업



G-PASS