

LED 보안등기구

주식회사 디앤알라이팅

등록제품 11개

발행일 2026.09.29

LED 보안등기구 제품목록

주식회사 디앤알라이팅

No.	제품사진	모델명	식별번호	계약단가	소비전력	SIZE	색온도	인증마크
1		DNR-S050-50W	23390540	310,000원	50±10%	514*267*90	5,028±283	     
2		DNR-SU60-60W	23662067	414,000원	60±10%	514*267*90	5,028±283	     
3		DNR-S50K-50	23839256	260,000원	60±10%	516*238*157	5,028±283	     
4		DNR-SCAT50W-50K	24339700	260,000원	60±10%	500*265*115	5,028±283	     
5		DNR-SCAZ60W-50K	24339702	270,000원	60±10%	570*250*72	5,028±283	     
6		DNR-SCAZ50W-50K	24339703	290,000원	50±10%	570*250*72	5,028±283	     
7		DNR-SCL-35S	25191341	260,000원	50±10%	514*267*90	3,465±245	     
8		DNR-SCL-50S	25191342	170,000원	50±10%	444*215*100	5,028±283	     
9		DNR-SL25W-35K	26182846	160,000원	25±10%	444*215*100	3,465±245	     
10		DNR-SL50W-35K	26182847	260,000원	50±10%	481*213*122	3,465±245	     
11		DNR-SL50W-30K	26182848	260,000원	50±10%	481*213*122	3,045±175	     

DNR-S050-50W


식별번호	23390540
계약단가	310,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
514*267*90	5,028±283	310,000원

제품도면 (Unit: mm)

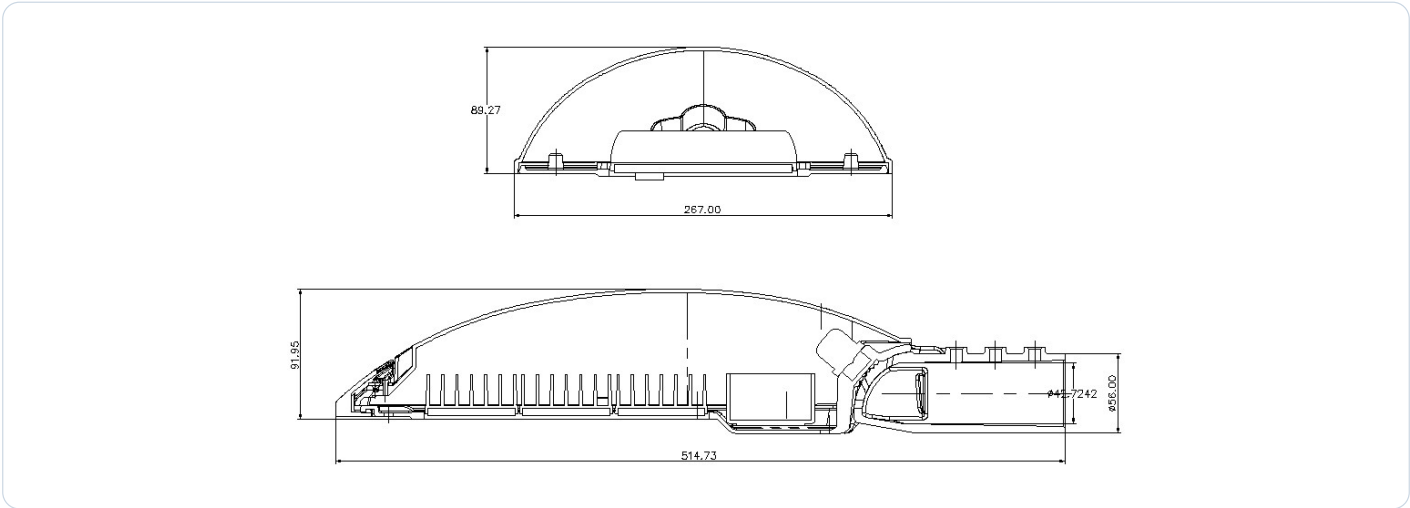

제품 사양

소비전력	50±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	5750이상	연색성(CRI)	75이상
색온도	5,028±283	SIZE	514*267*90
LED PKG	서울반도체	컨버터	UPF60S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.24±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-

DNR-SU60-60W


식별번호	23662067
계약단가	414,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
514*267*90	5,028±283	414,000원

제품도면 (Unit: mm)

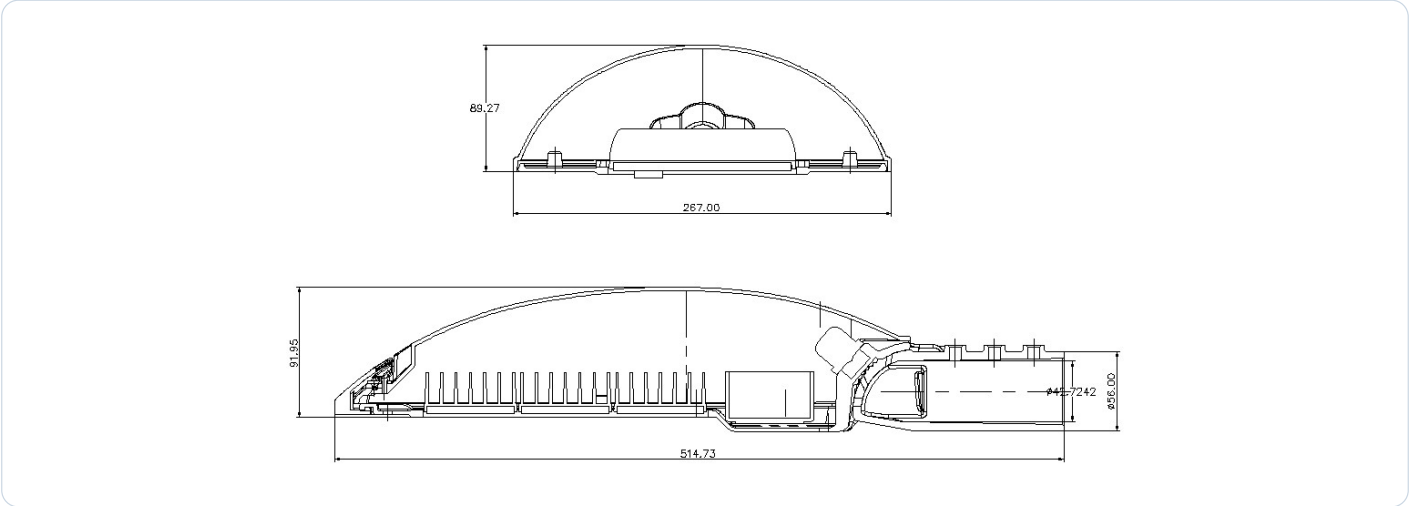

제품 사양

소비전력	60±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	6,600이상	연색성(CRI)	75이상
색온도	5,028±283	SIZE	514*267*90
LED PKG	서울반도체	컨버터	UPF60S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.28±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지



여성기업



G-PASS

DNR-S50K-50


식별번호	23839256
계약단가	260,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
516*238*157	5,028±283	260,000원

제품도면 (Unit: mm)

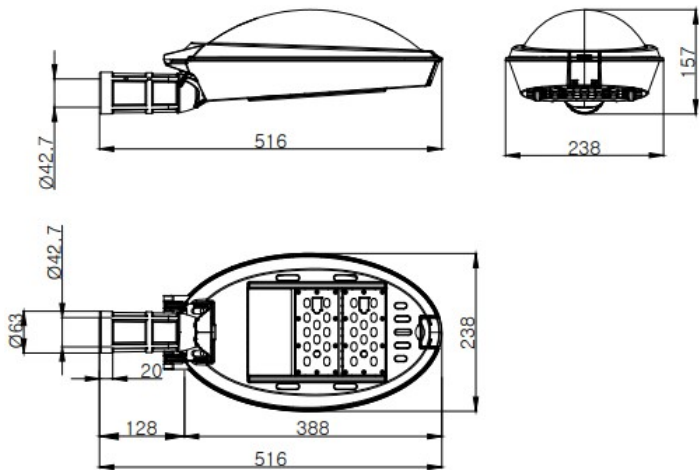

제품 사양

소비전력	60±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	6,600이상	연색성(CRI)	75이상
색온도	5,028±283	SIZE	516*238*157
LED PKG	서울반도체	컨버터	UPF60S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.28±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-

DNR-SCAT50W-50K


식별번호	24339700
계약단가	260,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
500*265*115	5,028±283	260,000원

제품도면 (Unit: mm)

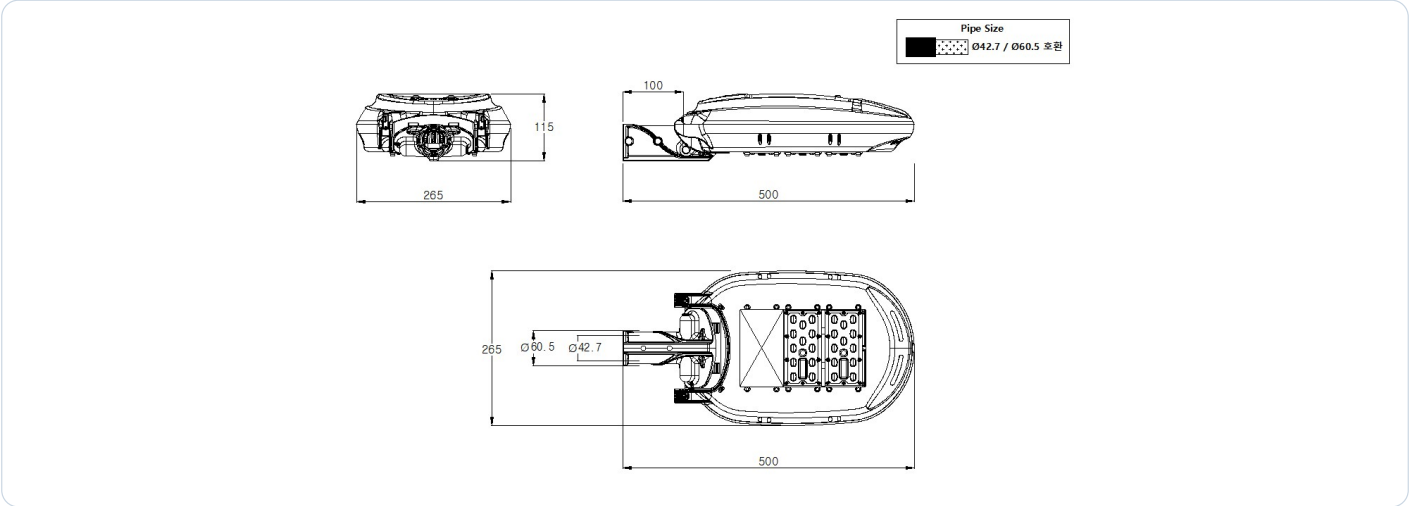

제품 사양

소비전력	60±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	6,600이상	연색성(CRI)	75이상
색온도	5,028±283	SIZE	500*265*115
LED PKG	제조사 확인 필요	컨버터	SLA-50SLD
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.28±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-

DNR-SCAZ60W-50K


식별번호	24339702
계약단가	270,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
570*250*72	5,028±283	270,000원

제품도면 (Unit: mm)

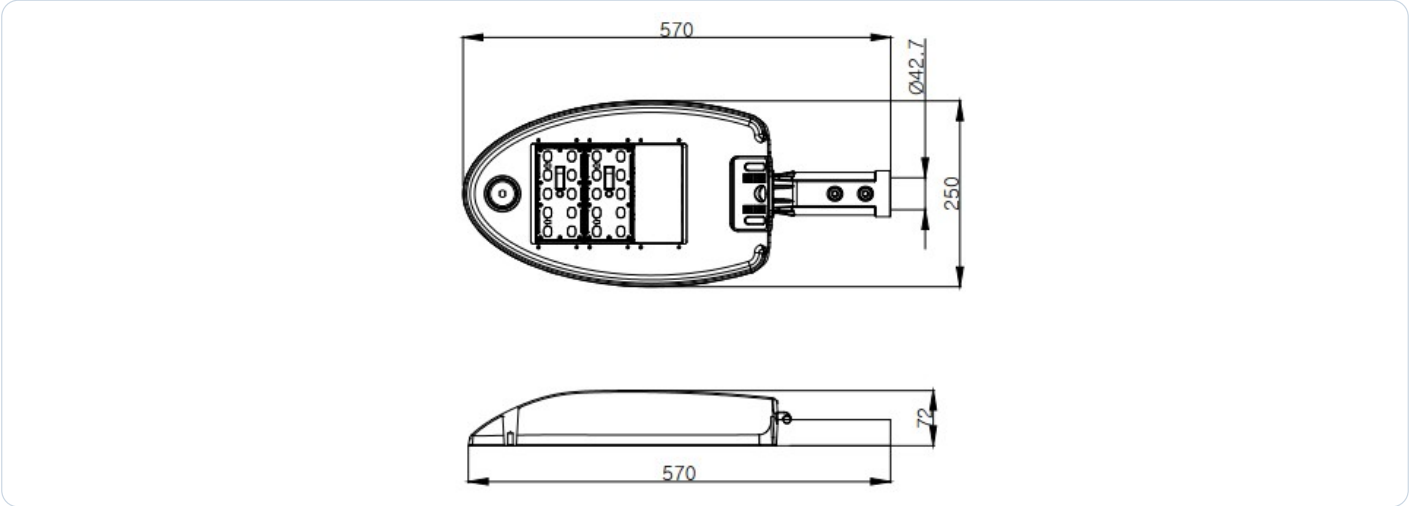

제품 사양

소비전력	60±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	6,600이상	연색성(CRI)	75이상
색온도	5,028±283	SIZE	570*250*72
LED PKG	제조사 확인 필요	컨버터	SLA-50SLD
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.28±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-

DNR-SCAZ50W-50K


식별번호	24339703
계약단가	290,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
570*250*72	5,028±283	290,000원

제품도면 (Unit: mm)

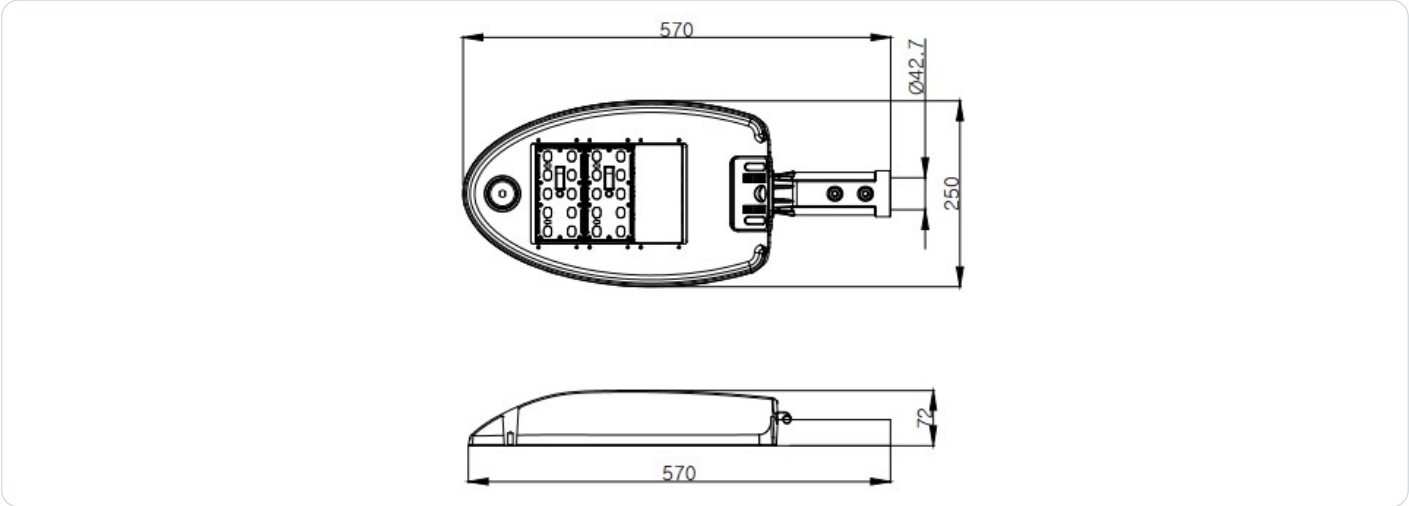

제품 사양

소비전력	50±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	5750이상	연색성(CRI)	75이상
색온도	5,028±283	SIZE	570*250*72
LED PKG	제조사 확인 필요	컨버터	SLA-50SLD
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.24±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-

인증











DNR-SCL-35S


식별번호	25191341
계약단가	260,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
514*267*90	3,465±245	260,000원

제품도면 (Unit: mm)

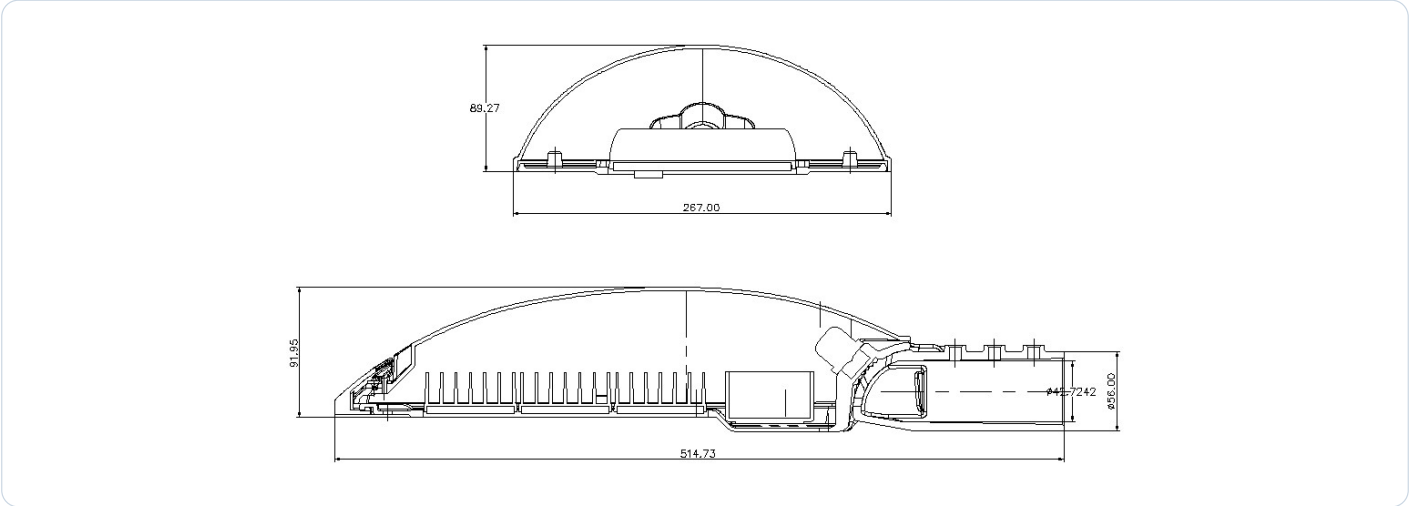

제품 사양

소비전력	50±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	5750이상	연색성(CRI)	80이상
색온도	3,465±245	SIZE	514*267*90
LED PKG	제조사 확인 필요	컨버터	UPF60S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.24±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-

DNR-SCL-50S


식별번호	25191342
계약단가	170,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
444*215*100	5,028±283	170,000원

제품도면 (Unit: mm)

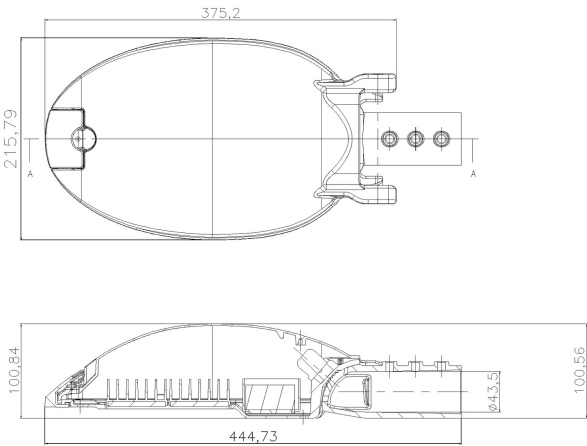

제품 사양

소비전력	50±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	5750이상	연색성(CRI)	80이상
색온도	5,028±283	SIZE	444*215*100
LED PKG	제조사 확인 필요	컨버터	UPF60S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.24±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-

DNR-SL25W-35K


식별번호	26182846
계약단가	160,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
444*215*100	3,465±245	160,000원

제품도면 (Unit: mm)

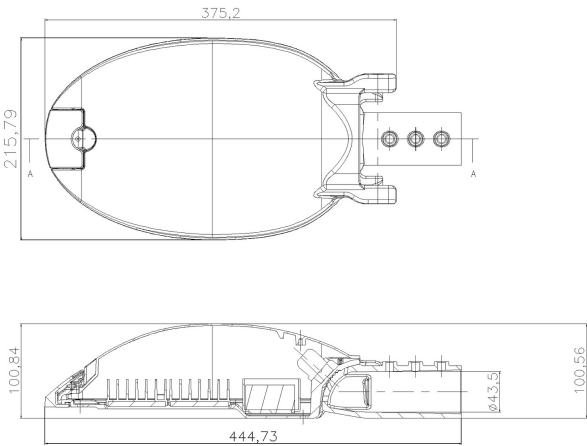

제품 사양

소비전력	25±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	5750이상	연색성(CRI)	80이상
색온도	3,465±245	SIZE	444*215*100
LED PKG	제조사 확인 필요	컨버터	UPF60S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.113±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지



여성기업



G-PASS

DNR-SL50W-35K


식별번호	26182847
계약단가	260,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
481*213*122	3,465±245	260,000원

제품도면 (Unit: mm)

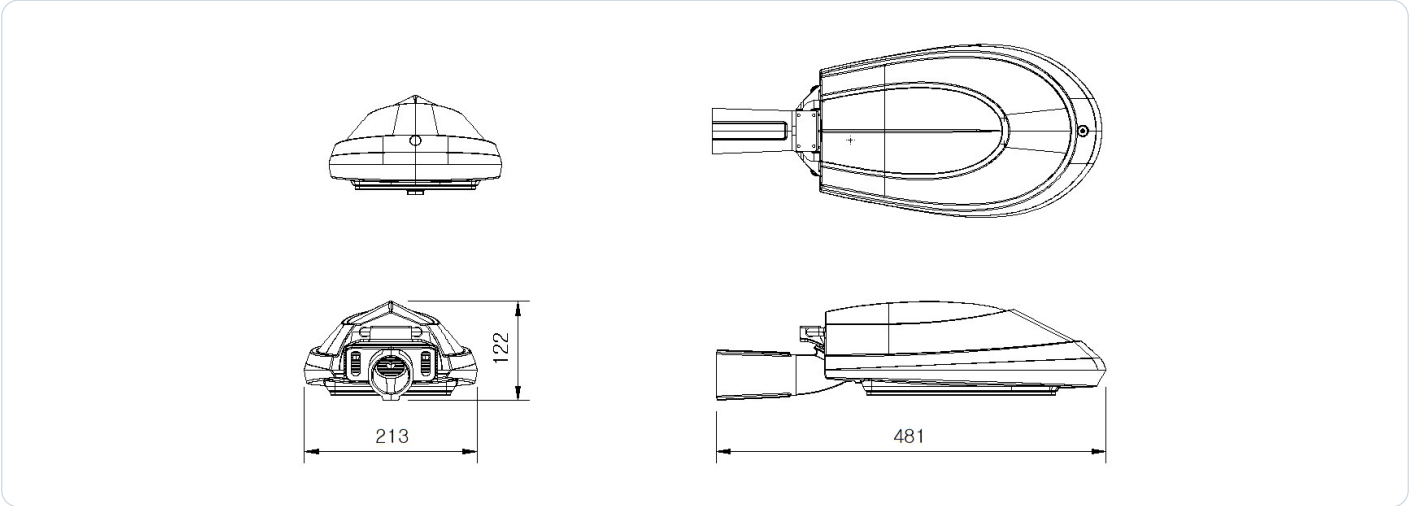

제품 사양

소비전력	50±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	5750이상	연색성(CRI)	80이상
색온도	3,465±245	SIZE	481*213*122
LED PKG	제조사 확인 필요	컨버터	UPF60S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.24±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-

DNR-SL50W-30K


식별번호	26182848
계약단가	260,000원



제품명
LED 보안등기구

SIZE	색온도	계약단가
481*213*122	3,045±175	260,000원

제품도면 (Unit: mm)

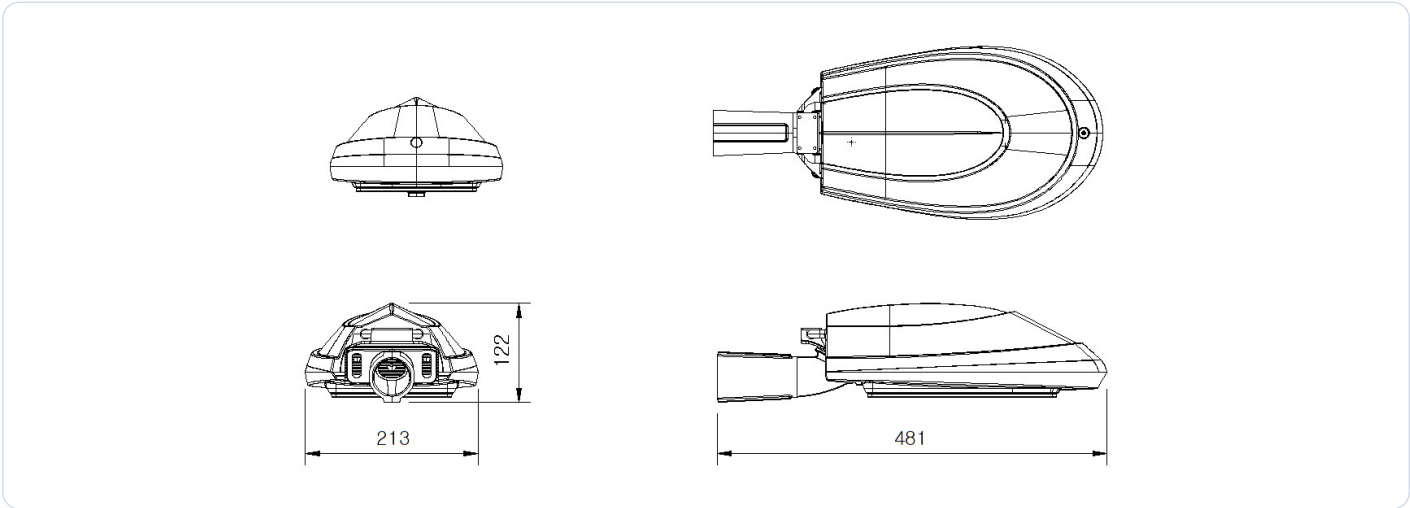

제품 사양

소비전력	50±10%	역률(PF)	0.9이상
입력전압	-	사용온도	-
광효율	115이상	방수등급	65이상
총 광속	5750이상	연색성(CRI)	80이상
색온도	3,045±175	SIZE	481*213*122
LED PKG	제조사 확인 필요	컨버터	UPF60S36CQ2
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.24±10%	초기광속 (%)	95%이상
광속유지율 (%)	90 이상	-	-