

LED 터널등기구

주식회사 디앤알라이팅

등록제품 13개

발행일 2026.09.29

LED 터널등기구 제품목록

주식회사 디앤알라이팅

No.	제품사진	모델명	식별번호	계약단가	소비전력	SIZE	색온도	인증마크
1		DNR-TL75	23865437	300,000원	75± 10%	-	2700 ~ 6020	    
2		DNR-TL100	23865438	325,000원	100± 10%	-	2700 ~ 6020	    
3		DNR-TL150	23865440	360,000원	150± 10%	-	2700 ~ 6020	    
4		DNR-RAIL16	24323065	201,000원	16 ±10%	-	2700 ~ 6020	    
5		DNR-RAIL25	24323066	350,000원	25 ±10%	-	2700 ~ 6020	    
6		DNR-AT50	25382054	265,000원	50± 10%	-	2700 ~ 6020	    
7		DNR-TN-EX50-E	25636897	219,000원	50± 10%	-	2700 ~ 6020	    
8		DNR-TN-EX50	25636898	220,000원	50± 10%	-	2700 ~ 6020	    
9		DNR-TN-EX75	25636899	250,000원	75± 10%	-	2700 ~ 6020	    
10		DNR-TN-EX75-E	25636900	230,000원	75± 10%	-	2700 ~ 6020	    
11		DNR-TN-EX100-E	25636901	270,000원	100± 10%	-	2700 ~ 6020	    
12		DNR-TN-EX150-E	25636902	320,000원	150± 10%	-	2700 ~ 6020	    

No.	제품사진	모델명	식별번호	계약단가	소비전력	SIZE	색온도	인증마크
13		DNR-TN-EX200-E	25636903	330,000원	200± 10%	-	2700 ~ 6020	    

DNR-TL75


식별번호	23865437
계약단가	300,000원



제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	300,000원

제품도면 (Unit: mm)

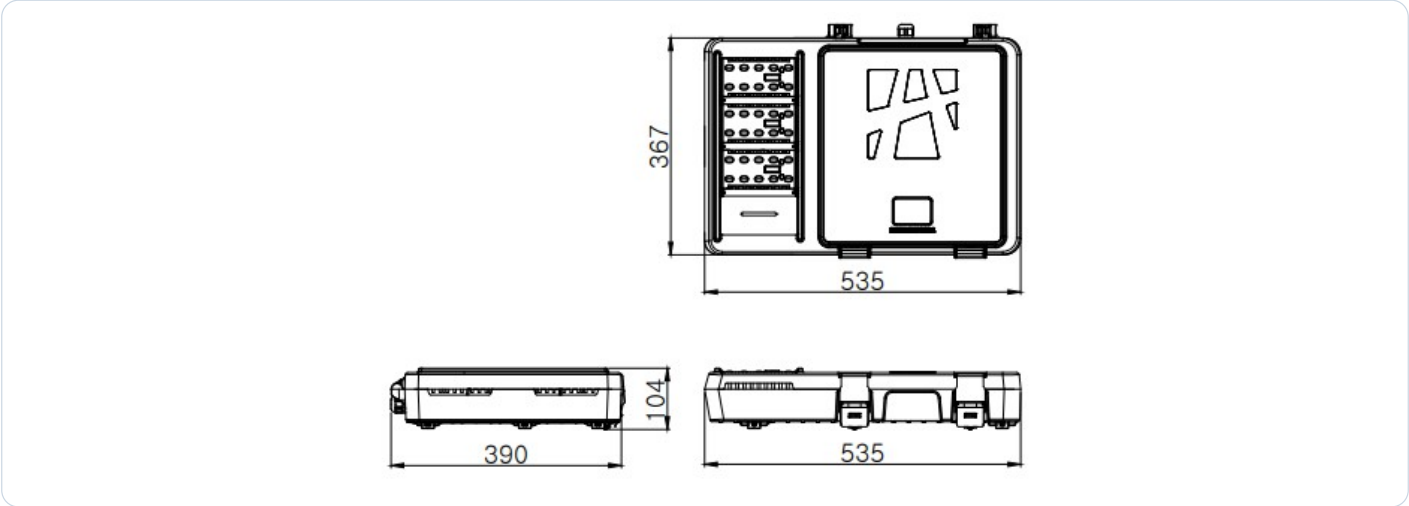

제품 사양

소비전력	75± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	8,625 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SPLW80-36
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.35 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-TL100


식별번호	23865438
계약단가	325,000원



제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	325,000원

제품도면 (Unit: mm)

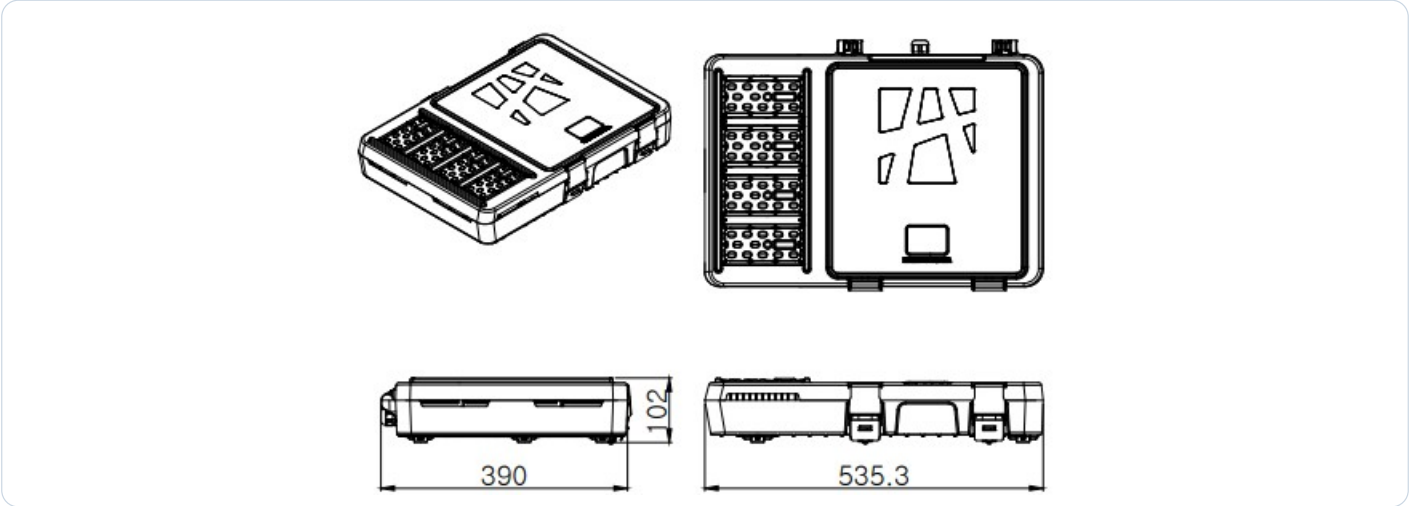

제품 사양

소비전력	100± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	11,500 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SPLW100-36
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.46 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지



여성기업



G-PASS

DNR-TL150


식별번호	23865440
계약단가	360,000원



제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	360,000원

제품도면 (Unit: mm)

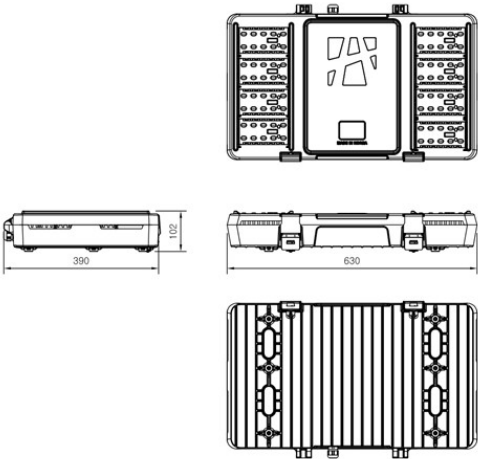

제품 사양

소비전력	150± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	17,250 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SPLW150-36
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.69 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지



여성기업



G-PASS

DNR-RAIL16


식별번호	24323065
계약단가	201,000원



제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	201,000원

제품도면 (Unit: mm)

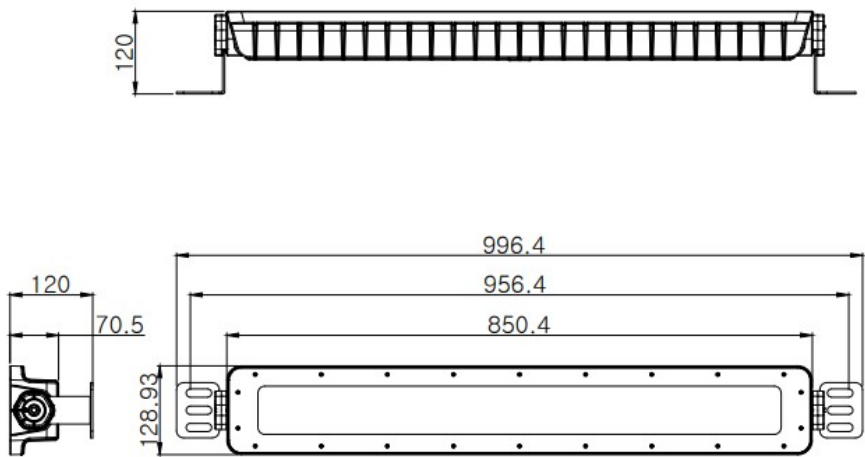

제품 사양

소비전력	16 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	1,840 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	제조사 확인 필요	컨버터	SKP-48V16WASS
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.073 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지



여성기업



G-PASS

DNR-RAIL25


식별번호	24323066
계약단가	350,000원



제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	350,000원

제품도면 (Unit: mm)

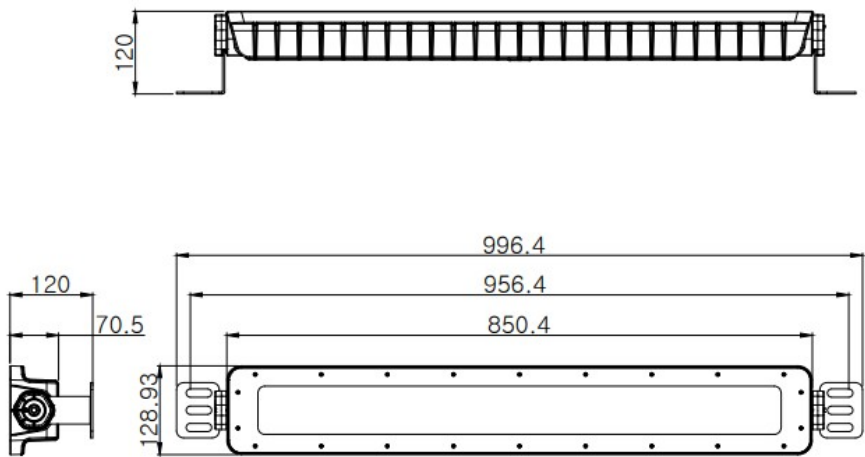

제품 사양

소비전력	25 ±10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	2,875 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	제조사 확인 필요	컨버터	SKP-48V25WASS
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.12 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지



여성기업



G-PASS

DNR-AT50


식별번호	25382054
계약단가	265,000원



제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	265,000원

제품도면 (Unit: mm)

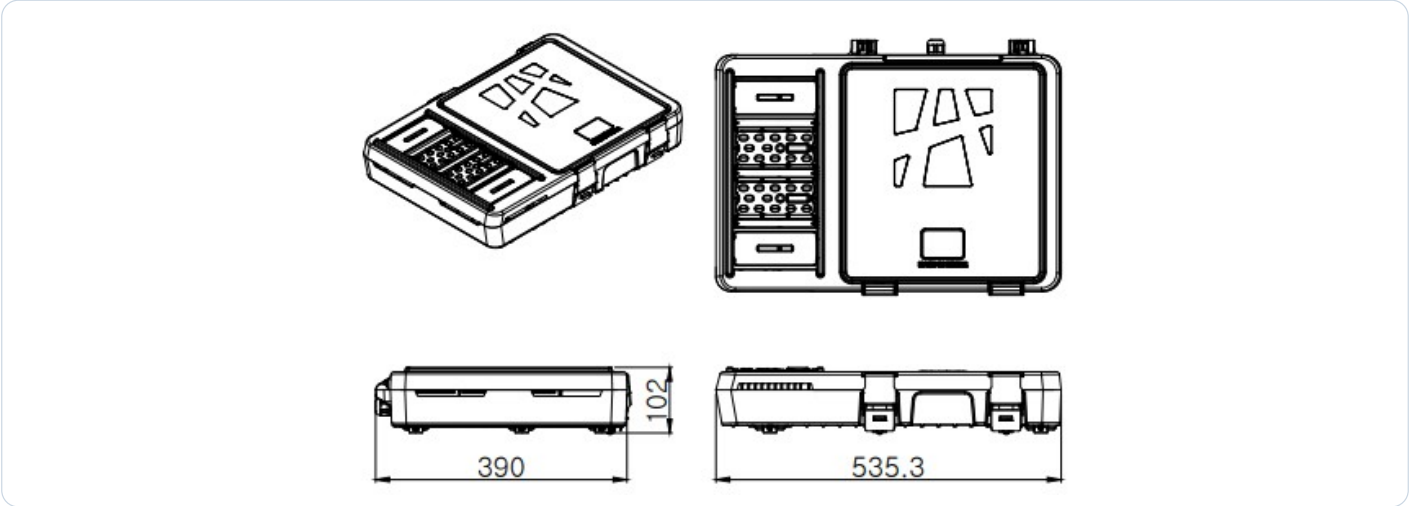

제품 사양

소비전력	50± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	5,750 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SPLW60-36
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.23 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지




여성기업



G-PASS

DNR-TN-EX50-E


식별번호	25636897
계약단가	219,000원

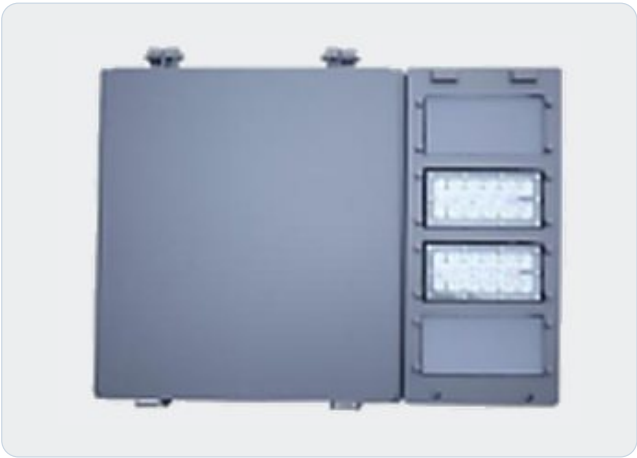

제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	219,000원

제품도면 (Unit: mm)

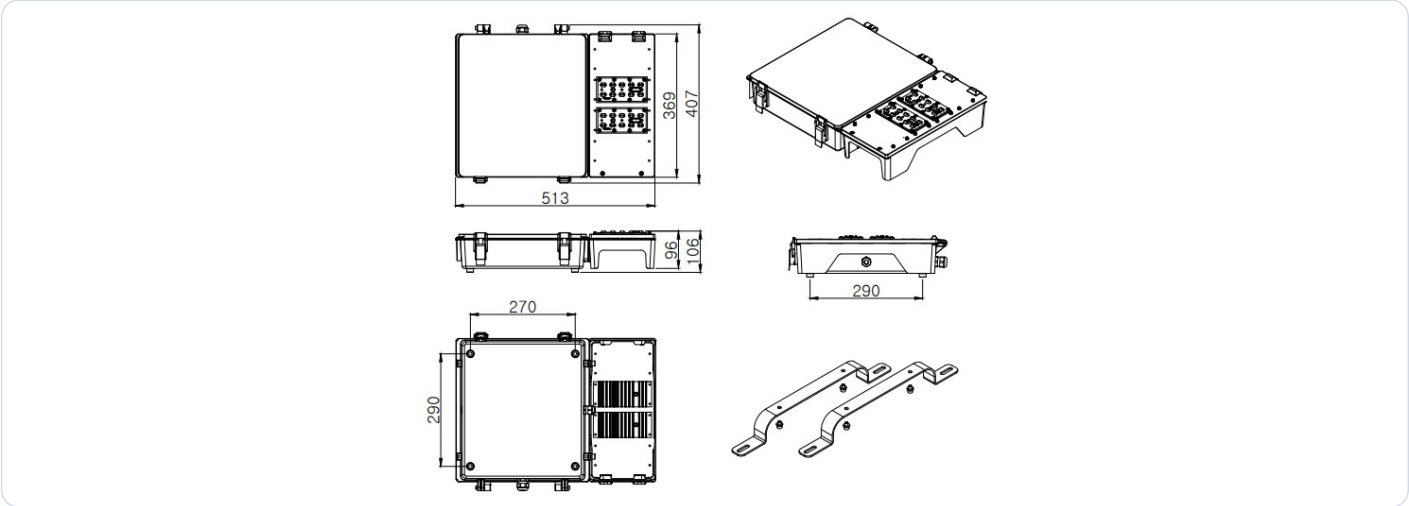


제품 사양

소비전력	50± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	5,750 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SLA-50A
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.23 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-TN-EX50


식별번호	25636898
계약단가	220,000원

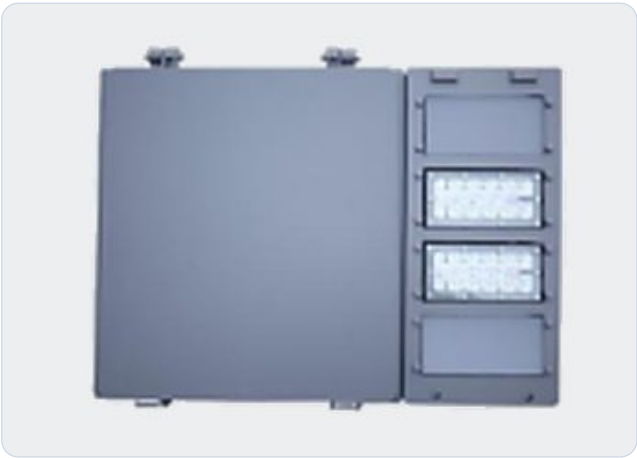

제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	220,000원

제품도면 (Unit: mm)

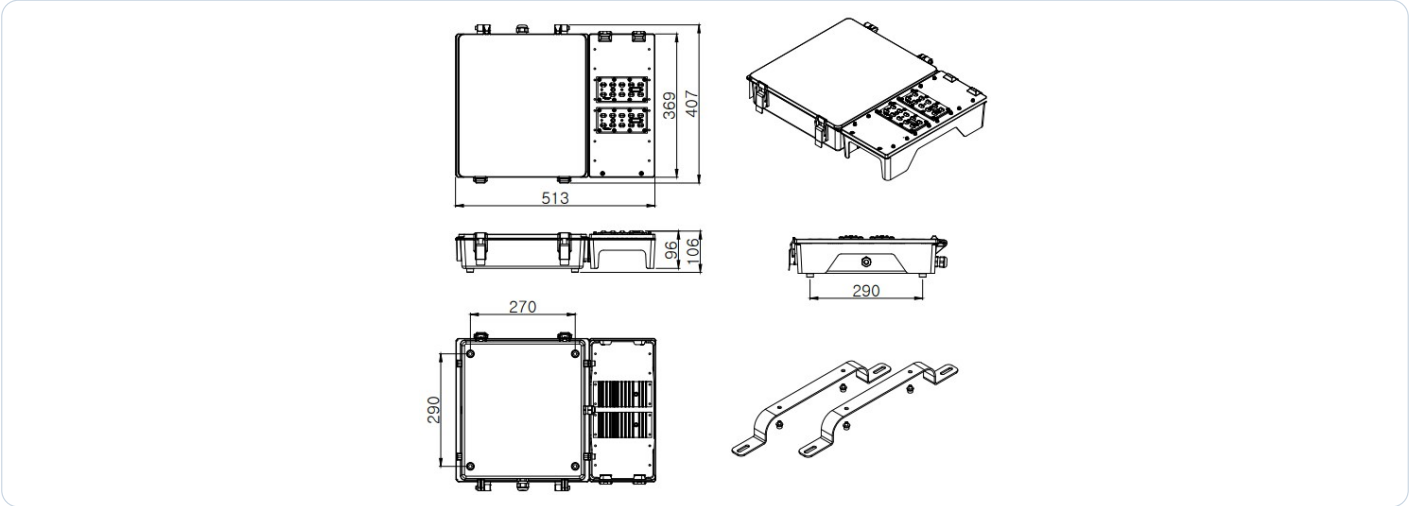

제품 사양

소비전력	50± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	5,750 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SLA-36A
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.23 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-TN-EX75


식별번호	25636899
계약단가	250,000원



제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	250,000원

제품도면 (Unit: mm)

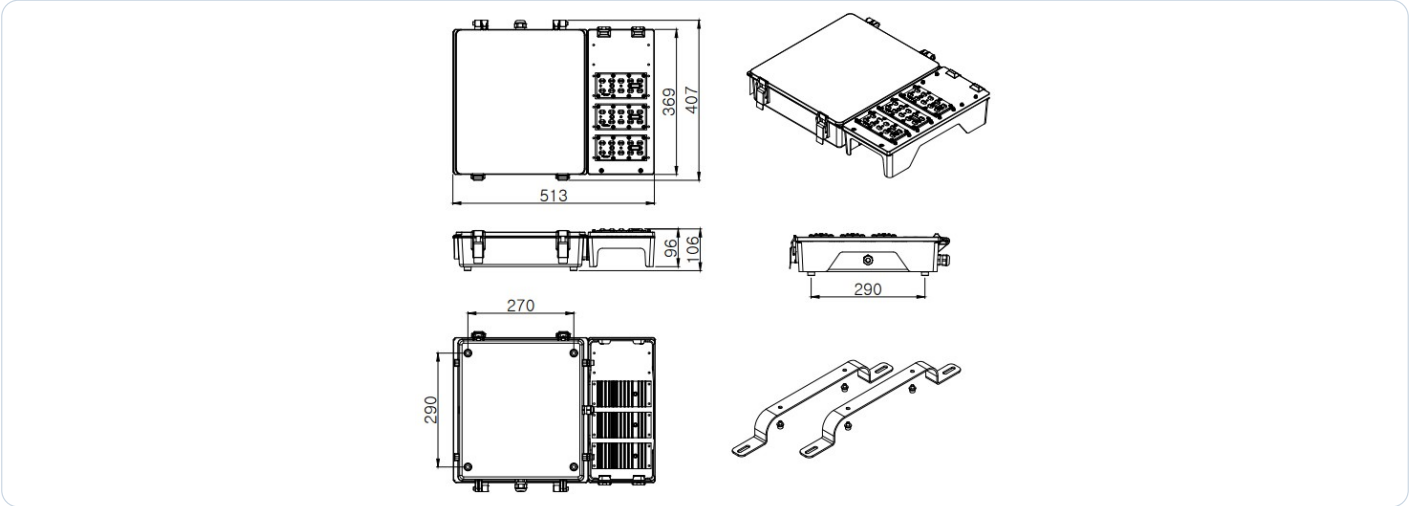

제품 사양

소비전력	75± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	8,625 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SLA-36A
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.35 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

인증





고효율



친환경 환경표지



여성기업



G-PASS

DNR-TN-EX75-E


식별번호	25636900
계약단가	230,000원



제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	230,000원

제품도면 (Unit: mm)

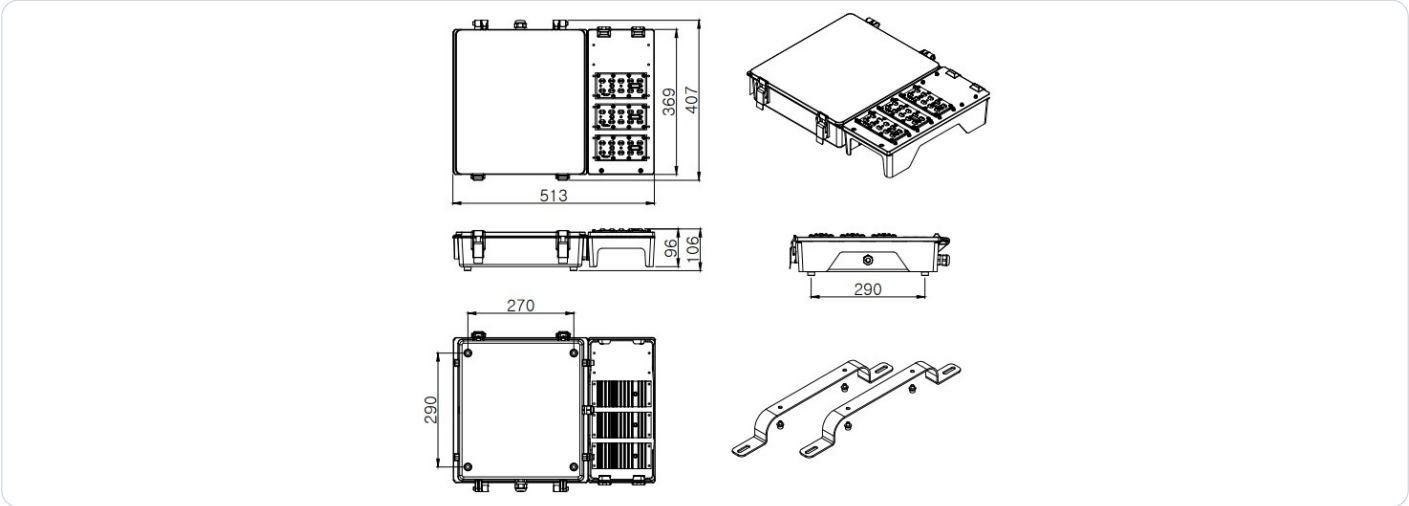

제품 사양

소비전력	75± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	8,625 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SLA-75A
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.35 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-TN-EX100-E


식별번호	25636901
계약단가	270,000원



제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	270,000원

제품도면 (Unit: mm)

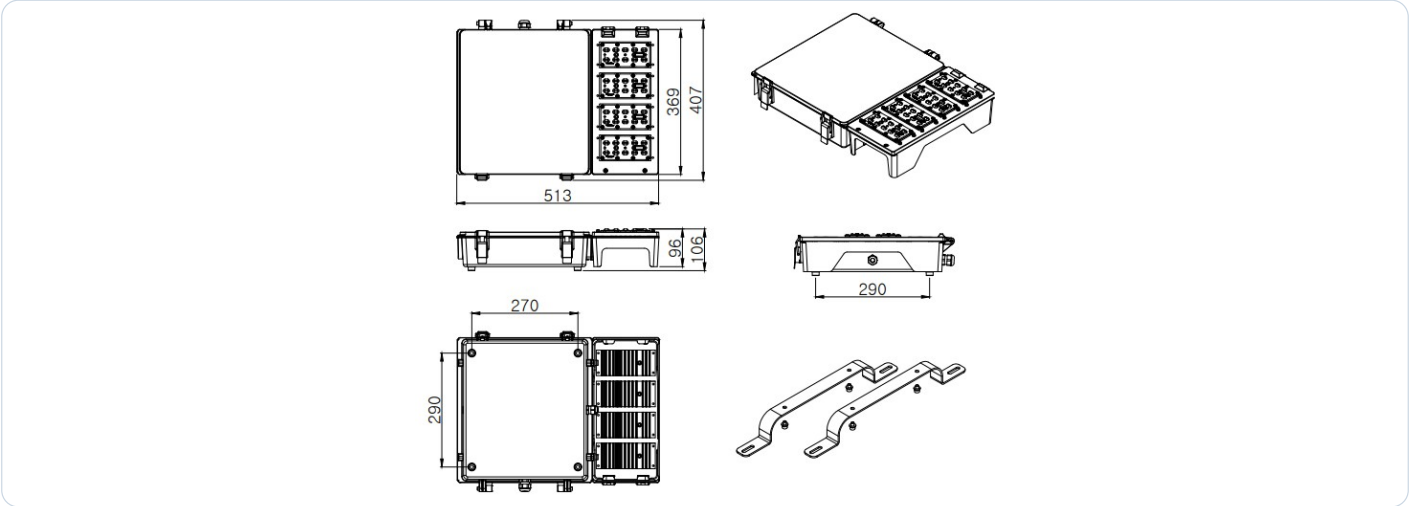

제품 사양

소비전력	100± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	11,500 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SLA-200H
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.46 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-TN-EX150-E


식별번호	25636902
계약단가	320,000원



제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	320,000원

제품도면 (Unit: mm)

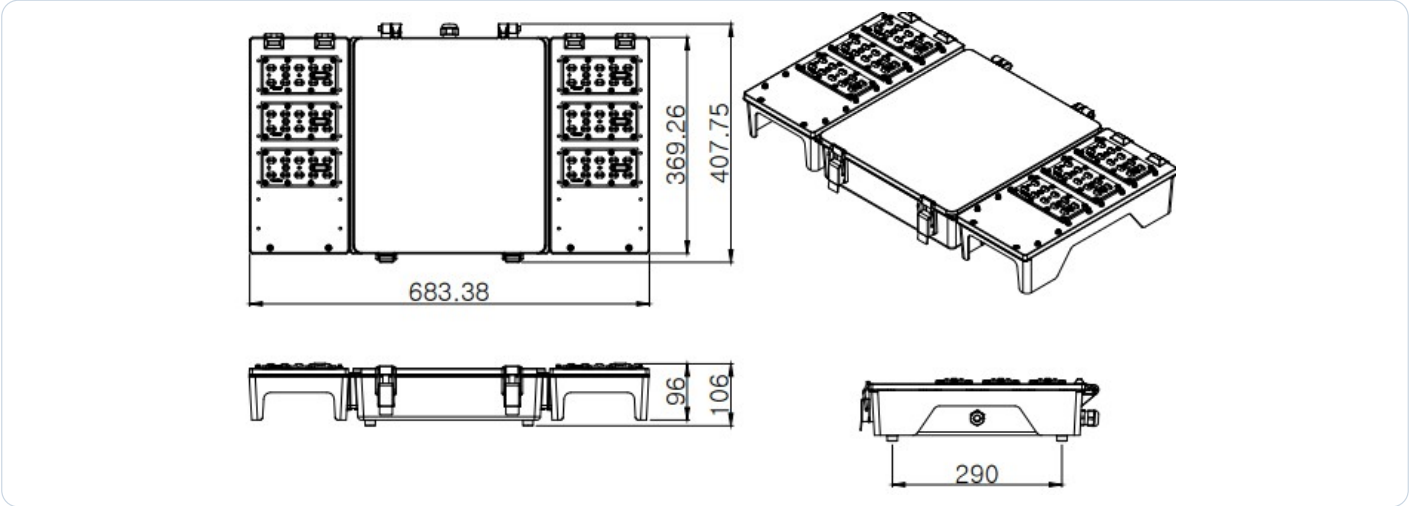


제품 사양

소비전력	150± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	17,250 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SLA-150L
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.69 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-

DNR-TN-EX200-E


식별번호	25636903
계약단가	330,000원

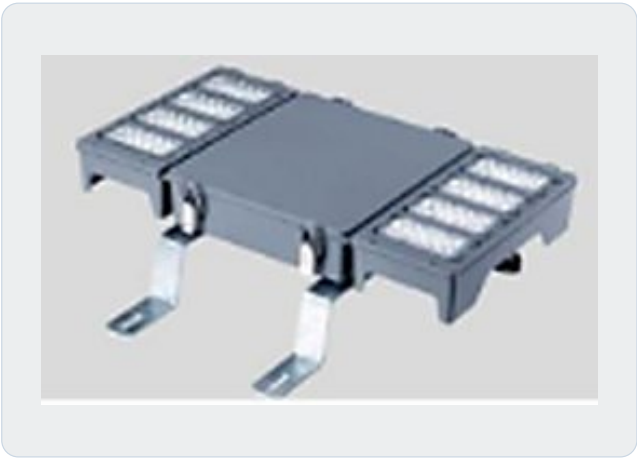

제품명
LED 터널등기구

SIZE	색온도	계약단가
-	2700 ~ 6020	330,000원

제품도면 (Unit: mm)

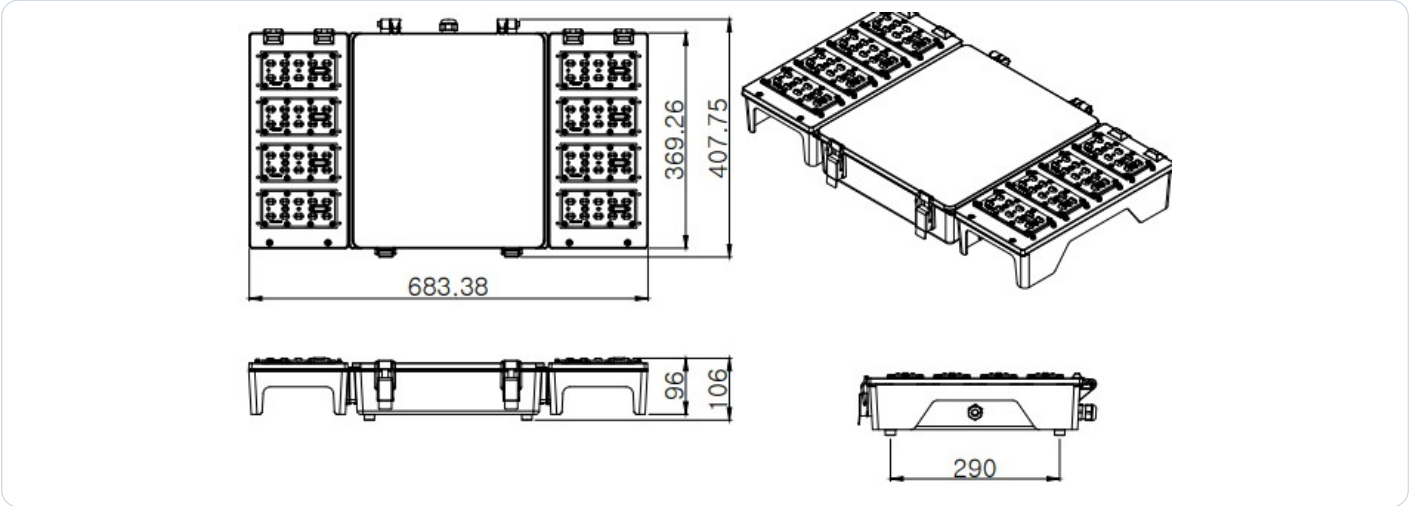

제품 사양

소비전력	200± 10%	역률(PF)	0.9 이상
입력전압	-	사용온도	-
광효율	115 이상	방수등급	IP66
총 광속	23,000 이상	연색성(CRI)	75 이상
색온도	2700 ~ 6020	SIZE	-
LED PKG	CREE	컨버터	SLA-200H
커버	-	재질	AL
수명	50,000시간	중량	-
입력전류 (A)	0.091 ±10%	초기광속 (%)	95% 이상
광속유지율 (%)	90 이상	-	-